


SPRAY TIP SELECTION GUIDE

When using the following NOX-CRETE Products Group products, please use the appropriate spray tip as indicated:

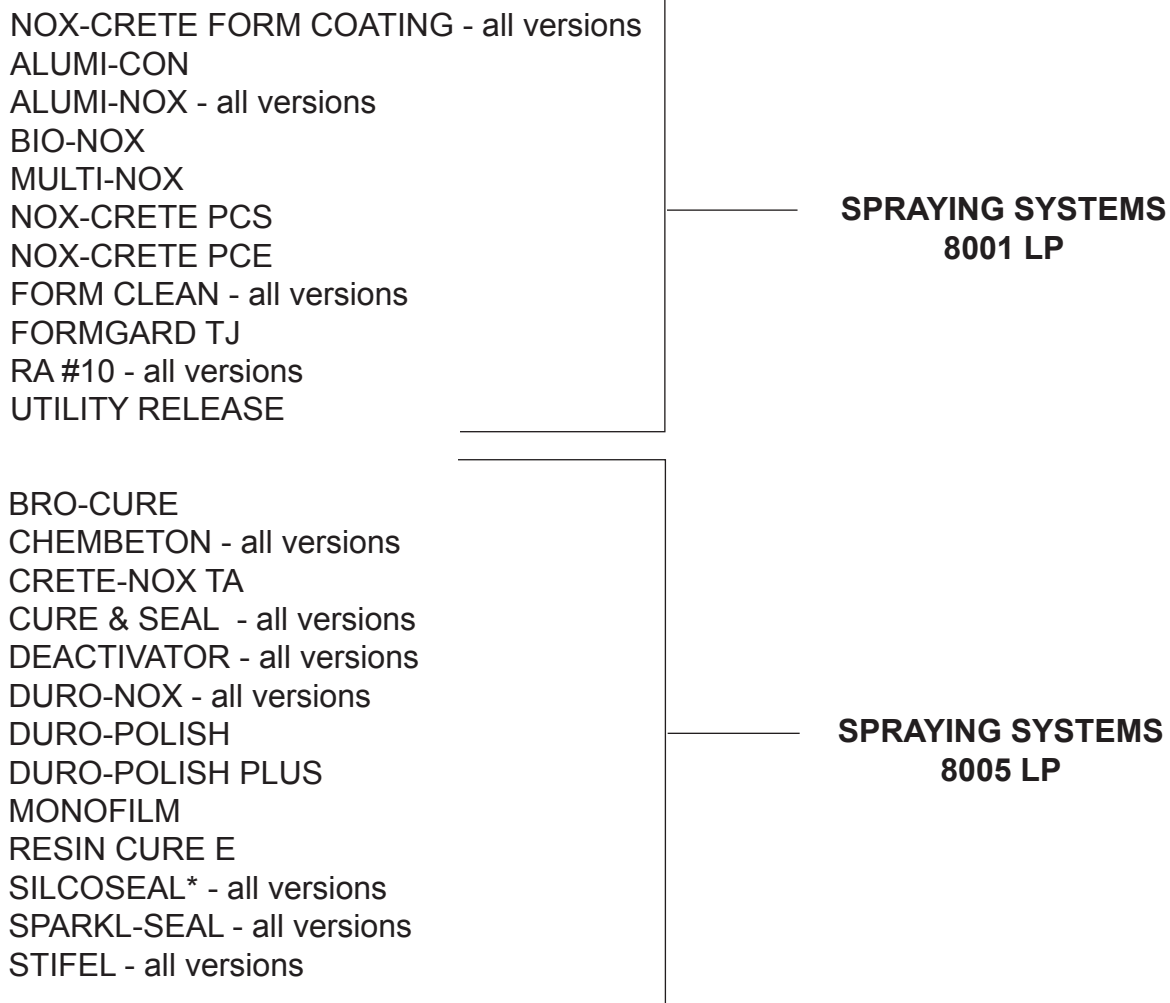

Note: Insert nylon gasket (Part #876 - Nox-Crete Perfect Form & Concrete Sprayer Parts List) at coupling between trigger valve and wand to prevent possible leakage from occurring.

*For proper application of SILCOSEAL cure and tilt-up bondbreakers, it may be necessary to use a smaller spray tip to prevent product over application. Review the SILCOSEAL product data information for specific spray tip and coverage rate recommendations.

7/30/08



chemical solutions to concrete problems